

JS056WK 5.6" DIGITAL WIRELESS REVERSING SYSTEM

The JS056WK is a simple to use wireless reversing system that allows for up to 4 wireless cameras to be connected. With a weatherproof, night vision camera included with the convenient twin display 5.6 inch monitor, everything you need for a safe journey is right here!

High Resolution 5.6 Inch LCD
Single or Twin Display
Up to 120m Range



2.4GHz Wireless





axis

 ∇

M



12/24 Multivolt

Wireless Cameras



2YEAR WARRANTY

a



JS056WK 5.6" DIGITAL WIRELESS REVERSING SYSTEM

143mm (5.6") Digital Colour

Normal/Mirror/Flip/Mirror-Flip

Split/Single/Auto-Scan

4 x Wireless 2.4 ~ 2.4835 GHz

640 x 480

4:3

SPECIFICATIONS

MONITOR

- LCD:
- Resolution:
- Aspect Ratio:
- Image Orientation: - Display:
- Inputs:
- Operating Frequency: - Decompression F
- Pairing to Camera
- Time Delay:
- Transmitting Ran
- Signal System:
- Other:
- On-board Loudsp
- Operating Tempe - Power Consump
- Power Supply:

CAMERA

- Image Device:
- Viewing Angle:
- Signal System:
- Effective Pixels: - Sync System:
- Operating Frequency: - Line of Sight Range:
- Compression Format:
- Transmitting Speed:
- Minimum Illumination:
- Night Vision Distance:
- Image:
- Microphone:
- Antenna:
- Ingress Protection:
- Operating Temperature:






Due to improvements in technology and design, specifications are subject to change without notice. Made in China

AUTOBACS Audioxtra is proudly part of the AUTOBACS SEVEN Global Network

INCLUDED IN THE BOX

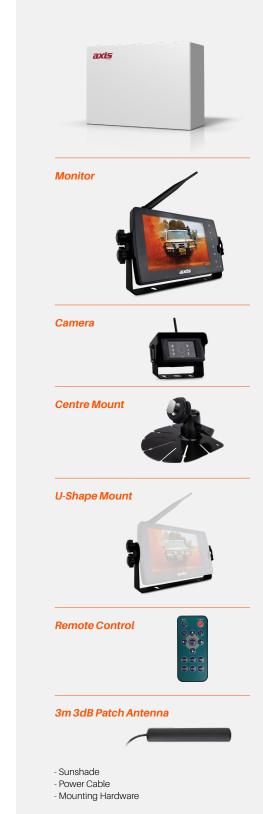

PACKAGING & PRODUCT INFORMATION

###

Outer Carton Dimension: Gift Box Dimension:	### (H) x ### (W) x ### (L) ### (H) x ### (W) x ### (L)
Product Dimension:	### (H) x ### (W) x ### (L)
Outer Carton Weight:	### kg
Gift Box Weight:	### kg
Product Weight:	### kg
-	-

Units per Carton:

audioxtra.com.au

2YEAR WARRANTY

INCLUDED Support Brackets:

- Sunshade
- Remote Control
- 3m 3dB Patch Antenna
- U-Shape Mount

- Power Cable Mounting Hardware
- Centre Mount

- 1/3" PC1089 CMOS 512 x 582 2.4 ~ 2.4835 GHz
- 120 metres MPEG4 12 Mbps 0 Lux (12 IR LEDs) 10m
- Mirror Yes Fold Down and Patch Type (3m)
- IP67 -20~+60°C DC 10-32V

120°

PAL

Internal

- Power Supply:

Format	MPEG4
a/s:	Auto when camera activate
	120ms
nge:	120 Metres (approx)
	PAL/NTSC Select
	Touch Buttons/Auto Dim
peaker:	1W/8 Ohm
erature:	-20~+60°C
tion:	5W Max
	DC 10-32V

ed