



Australia

# DuraLED®-S Rear Signal Lamp Series Built for the Future

**DuraLED®-S, new slim signal lamps feature a clear lens and are interchangeable with the existing DuraLED® rear lamp series**

HELLA is enhancing its 26-year legacy of the DuraLED® product line by updating the iconic range to meet the latest automotive design standards and international regulations.

The new slim DuraLED®-S range offers a fully interchangeable, retrofit solution for existing models. It features the same completely sealed, maintenance-free “Fit & Forget by Design” construction, ensuring long-term durability, safety, and an ultra-long service life.



Interchangeable with  
existing DuraLED®

New slim design

12/24V Multivolt™  
HCS & EDT



Fully sealed and submersible

Resistant against harsh UV

Approved for use in  
New Zealand and Australia

# DURALED®-S

## REAR SIGNAL LAMP SERIES



**2SB 017 007-201**  
Tail and Stop Lamp




**2BA 017 006-201**  
Rear Direction Indicator Lamp



**2ZR 017 008-201**  
Reversing Lamp



|                          |                                                                                                                                                                                                      |             |                 |          |                        |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------|----------|------------------------|
| Mounting                 | Surface mount with mounting bushes supplied.<br>Suitable for horizontal and vertical mounting                                                                                                        |             |                 |          |                        |
| Voltage                  | Multivolt™ for optimum brightness at input voltages from 9 to 33 volts                                                                                                                               |             |                 |          |                        |
| Power Consumption        | Stop:                                                                                                                                                                                                | 8W          |                 |          |                        |
|                          | Rear Position:                                                                                                                                                                                       | 2W          |                 |          |                        |
|                          | Night:                                                                                                                                                                                               | 2W          |                 |          |                        |
|                          | Rear Direction Indicator:                                                                                                                                                                            | 7W          |                 |          |                        |
|                          | Reversing:                                                                                                                                                                                           | 10W         |                 |          |                        |
| Temperature              | Operating range -40° to +60°C                                                                                                                                                                        |             |                 |          |                        |
| Lens Material            | Hi Impact PMMA                                                                                                                                                                                       |             |                 |          |                        |
| Protection               | Reverse polarity and transient spike circuit protection.<br>IP 6K7 (Protection against dust and temporary water immersion)<br>IP 6K9K (Protection against dust and high-pressure/steam jet cleaning) |             |                 |          |                        |
| Cable                    | 2.5m of sheathed multi-core cable.                                                                                                                                                                   |             |                 |          |                        |
| Compliance               |                                                                                                                                                                                                      |             |                 |          |                        |
| Stop/Tail                | E24 5942                                                                                                                                                                                             | ECE R148/01 | ADR 49/00       | E24 5082 | ECE R10/06             |
| Rear Direction Indicator | E24 0924                                                                                                                                                                                             | ECE R148/01 | ADR 6/00 Cat 2a | E24 4530 | ECE R10/06 ISO 13207-1 |
| Reverse                  | E24 0925                                                                                                                                                                                             | ECE R148/01 | ADR 1/00        | E24 5081 | ECE R10/06             |

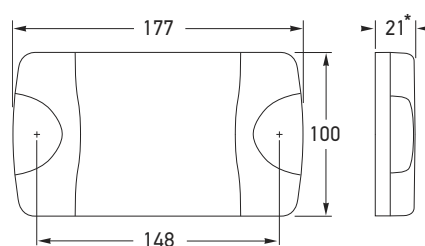

All dimensions in mm

All Models share the same width, length, and mounting holes as previous DuraLED® range.

\*New models are 5mm slimmer.



| Product picture | Description                   | Part number     | Note                                  |
|-----------------|-------------------------------|-----------------|---------------------------------------|
|                 | Tail and Stop Lamp            | 2SB 017 007-201 | Optic appears clear until illuminated |
|                 | Rear Direction Indicator Lamp | 2BA 017 006-201 |                                       |
|                 | Reverse Lamp                  | 2ZR 017 008-201 |                                       |